

WOCA Panel White

- for the lightening of yellowed wood,
e.g. ceilings and wall panels



- For lightening of panels, doors and door frames made in light coloured types of wood
- Ensures a light, lye treated appearance
- Preserves the natural structure of the wood
- Certified by IBR

Product info

Container: 2,5 litre

Consumption: 10-12 m²/litre

Available in white and extra white



Application area

For lightening of any type of unfinished or lacquered panels, doors and door frames made in light coloured types of wood. Not suitable for wood floors.

Result

Penetrates into the pore system of the wood and provides the wood with a "lye-like" appearance, which preserves the natural structure of the wood.

Application

Apply with a brush in an even, not too thick layer. Clean all surfaces with Wood Cleaner before treatment. Sand lacquered surfaces slightly with a fine sandpaper.

After care


Not required.

Maintaining and cleaning

Wash with a hard-wrung cloth.

How to do...

- WOCA Panel White: Lightening of yellowed wood

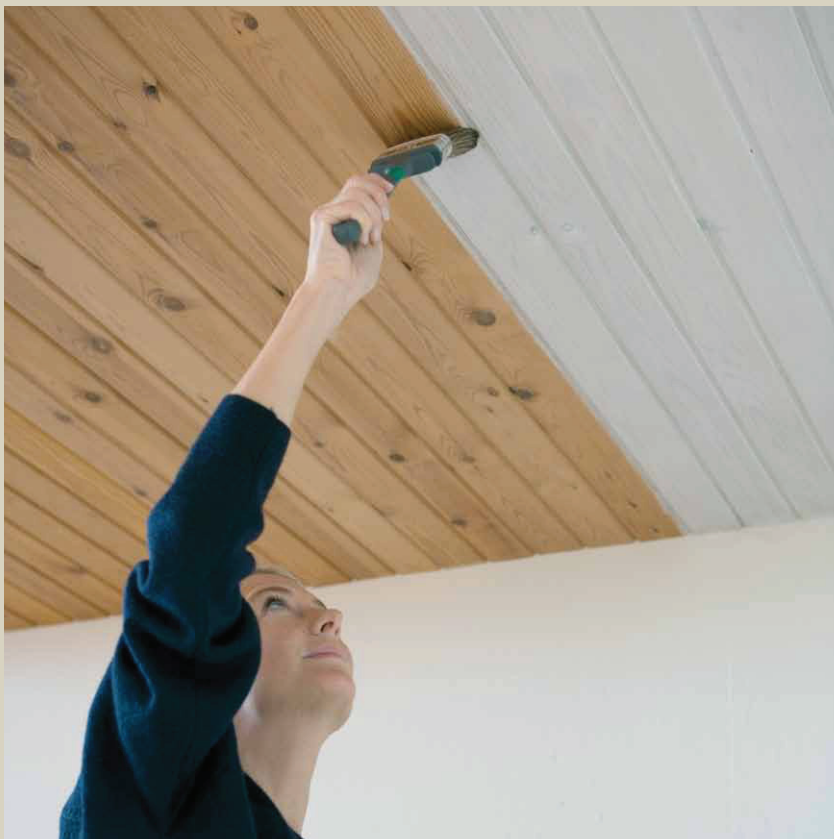

Tools

Wide brush for lye or water-based products.

Small round brush for profiles and edges.

Clean tools with water and soap.

Panel White is a water-based product for the lightening up of yellowed wood, e.g. ceilings and wall panels. Panel White is used indoors for untreated and lacquered softwood.

- 1** The wood must be clean and completely dry. Clean with Wood Cleaner mixed with water in the ratio 1:40. Wipe off with clean water. Loose lacquer residues applied earlier must be removed.
It is recommendable to make a small test with the product on a less visible place to evaluate the result.
- 2** Stir Panel White carefully before and during use. Container with different batch numbers should be mixed before use to avoid differences in shade and gloss.
- 3** Apply the product with a brush in an even layer lengthwise the wood grain. Do not apply on more than 3-4 boards at the time and finish them to avoid overlaps.

Maintenance

The treated wood surface may be cleaned with Wood Cleaner mixed with water in the ratio 1:40.

It is recommendable to use a hard wrung cloth.