



Product specification sheet



- **Profile type:**

711

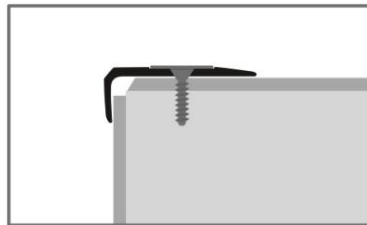

- **Type:**

711

- **Description:**

Stair nosing for slip-resistant insert, made of aluminium, countersunk drilled

- **Application:**

protection of the stair nosing's corners

- **Length of the profile:**

1.0 m / 2.5 m / 5.0 m

- **Width of the profile:**

38 mm

- **Height of the profile:**

15 mm

- **Alloy of the profile:**

AlMgSi0,5F22 / MS58

- **Anodized colours:**

F4 silver, **F5** gold, **F9** sand, **F6** bronze, **F2** stainless steel optic

- **Additional colours:**

F3 aluminium polished, **F7** brass polished

- **Fixation:**

screwing, countersunk drilled holes 3,0 mm

- **slip-resistant insert:**

2510/23 without granulation GE1 black, GE3 brown, GE5 beige
2511/23 with granulation GE7 black, GE8 yellow, GE 9 grey
2512/23 with PVC GS1 black, GS2 silver, GS3 brown, GS4 brass, GS5 beige, GS6 grey



The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

Product specification sheet



Installation/Laying

1. It should be ensured that all surfaces to which the profile is to be fixed are dry, flat and free from any contaminants.
2. Cut the profile to the sized required.
3. Use the bore holes of the profile to drill the holes in the floor pavement.
4. Put the dowels in every drill hole and place the profile in the same position.
5. Put screws in every bore holes and screw it tight.
6. Stick the self adhesive slip-resistant insert in the indentation of the profile.
7. If any further information is required, please do not hesitate to contact Küberit, +49 2351 95070 or fax on +49 2351 9507200 or ask for our installation guideline movie on DVD.