




Product specification sheet

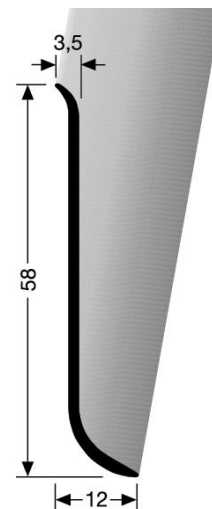

- **Profile type:**

912 U

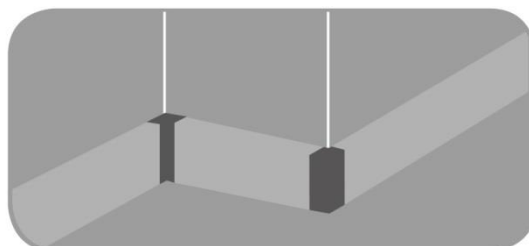

- **Description:** Skirting board, made of aluminium, undrilled
- **Application:** Skirting for all kind of floorings to be glued on the wall
- **Length of the profile:** 2.50 m
- **Width of the profile:** 12 mm
- **Height of the profile:** 58 mm
- **Gauge of the profile:** 3.5 mm
- **Min. bendable diameter:** 50 cm 
- **Alloy of the profile:** AlMgSi0,5F22
- **Anodizing colors:** silver (F4), stainless steel optic fine grinded (F2G)
- **Other colors:** On demand and for a minimum quantity of 50 pieces we can offer anodized in other colors as well as powder coating in several RAL color. For the formal pieces additional colors are not provided from us.
- **Bendable:** The skirting is bendable with our bending machine.

Product specification sheet



Available accessories are left and right end caps, connectors, internal and external corners made of plastic and lacquered in the two colors of the skirting.

ENDSTÜCKE, ECKEN UND VERBINDER • END CAPS, CORNERS UND CONNECTOR²



Endstück, links
end cap, left



Endstück, rechts
end cap, right



90° Außenecke
90° external corner



90° Innenecke
90° internal corner



Verbinder
connector

² Kunststoff in silber und edelstahl lackiert (nicht fein geschliffen)
Kunststoff in silver and stainless steel lackiert (nicht fein geschliffen)

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

Installation/Laying

1. Ensure that the wall is dry, even and free from dirt. If the wall is dusty it may be necessary to use a suitable primer before the installation.
2. Remove the protective film from the surface of the skirting.
3. Cut the skirting to the required length using an appropriate blade and cutting tool for aluminium.
4. Apply suitable cartridge adhesive on the back of the profile. Apply the profile to the wall and press equally along the entire length to ensure full contact of the adhesive with the wall.
5. To provide accurate finishes to the profile ends, internal and external corners along with end caps and connectors of plastic are recommended.

For further information for the installation use our video which you find on our website www.kueberit.com under downloads and you find additional information in our brochure "Deco Base-Board".