


Product specification sheet




- **Profile type:**

917 U

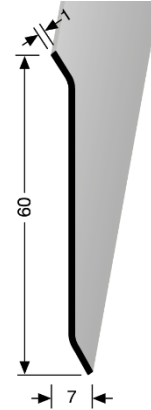

- **Description:** Skirting board, made of stainless steel, undrilled
- **Application:** Skirting for all kind of floorings to be glued on the wall
- **Length:** 2,50 m
- **Width:** 7 mm
- **Height:** 60 mm
- **Finish:** matt brushed (grain 240)
- **Steel grade:** 1.4301 = AISI 304 (according to EN 10027-2)
- **Additional grade DIN:** X5CrNi18-10; (V2A)
- **Additional grade name:** 18/10
- **Additional accessories:** 90° interior corner & 90° exterior corner

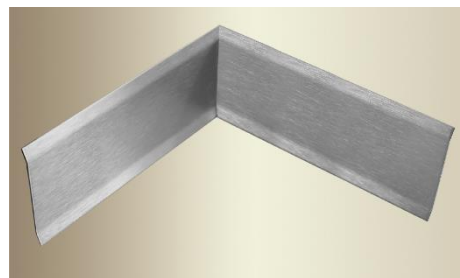

Product specification sheet



The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

Installation/Laying

1. Ensure that the wall is dry, even and free from dirt. If the wall is dusty it may be necessary to use a suitable primer before the installation.
2. Remove the protective film from the surface of the skirting.
3. Cut the skirting to the required length using an appropriate blade and cutting tool for aluminium.
4. Apply suitable cartridge adhesive on the back of the profile. Apply the profile to the wall and press equally along the entire length to ensure full contact of the adhesive with the wall.

Attention: For the cutting of stainless steel please pay attention that the cutting is made with tools which are made especially for steel, the correct speed of cutting to avoid that the steel gets blue.

For further information for the installation use our video which you find on our website www.kueberit.com under downloads and you find additional information in our brochure "Deco Base-Board".